

MiDoMet Battery Pack (MD.BATT.36V)



Battery pack consisting of lithium cells - thionyl chloride (Li-SOCL₂)
This battery pack is ideal for long-term applications such as powering electrical pressure / level transducers or backup power supplies.

FEATURES


- Nominal capacity: 38.000mAh
- Open circuit voltage: 3,6V
- Max. direct current: 1.800mA
- Max. pulse current: 3.500mA
- Working temperature: -55 °C / +80 °C
- Self-discharge 1% a +25 °C
- Compliant con IEC 86-4

WARNINGS and STORAGE


Store in a clean, dry place and under temperature conditions between 20/30 ° C

Do not recharge, disassemble or subject to temperatures above 85 ° C or in conditions that could cause an explosion or fire

Self-discharge at 25 °C

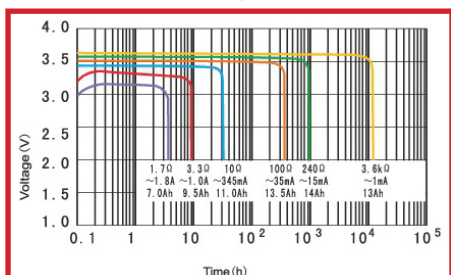

Volt/Temperature

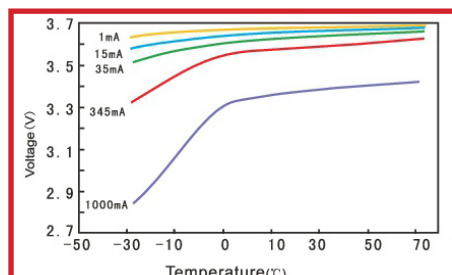

Capacity / Current (cutoff 2.0V)

